



carmanah®
we put solar to work

MODEL

OL2A

SOLAR MARKING LIGHT

WITH CUSTOM OPTICS, HIGH-EFFICIENCY SOLAR PANELS AND PREMIUM MATERIALS, THE OL2A OFFERS EXCELLENT VALUE AND EXTREMELY RELIABLE OPERATION FOR OVER FIVE YEARS.

Advanced Optics

- Up to 26 cd intensity
- Up to 40 user-adjustable flash patterns with ability to direct enter intensity
- Available in red, white, green, yellow and blue

Easy Installation

- Installs in minutes; "out-of-box" operation
- Flange-mount and pole-mount options
- Automatic dusk-to-dawn operation or optional on/off switch
- Optional mini IR remote accessory

Low Maintenance

- Replaceable batteries: AA NiMH, high-temperature-rated
- Next generation, energy-saving Automatic Light Control; five-day data trending regulates intensities for longer battery life and optimal performance 12-months a year.

Reliable

- Premium grade, UV resistant polycarbonate body and lens material
- Waterproof; IP 68 immersion
- Ventilated battery compartment
- Life expectancy over 15 years; 3 year warranty

Trusted

With thousands of installations worldwide, Carmanah solar LED lights operate year-round at permanent and temporary installations.

A PRACTICAL, COMPACT AND LOW-MAINTENANCE SOLUTION FOR MARKING BARRICADES, FENCING, CONSTRUCTION AREAS, GROUND OBSTACLES, AND OTHER HAZARDS. IDEAL FOR REMOTE OR HARD-TO-ACCESS LOCATIONS.

More than three times the range of the original OL2!


ORION
SOLAR Pty Ltd




Carmanah Technologies Corp. • Web: carmanah.com • Telephone: 1.250.380.0052 • Fax: 1.250.380.0062 • Email: info@carmanah.com

Orion Solar Pty Ltd, Unit 36, 30 Mudgeeraba Road, Worongary, Queensland 4213 07 5559-1666 fax 07 5559 0288

www.orionsolar.com.au



OPTIONAL INFRARED PROGRAMMER



FLANGE MOUNT



POLE MOUNT

MODEL

OL2A

SOLAR MARKING LIGHT

SPECIFICATIONS	
	26 cd peak intensity; see table
	High Power LED
Optical	Red, Green, White, Yellow, Blue
	Proprietary optical design
	40 flash patterns
Energy Collection	Best-in-class high-efficiency solar cells 0.6 W
Battery	Three high-temperature NiMH AA batteries rated for -40 to 185 °F (-40 to 85 °C)
	Designed for 5 year battery life; Replaceable and recyclable
Energy Management System (EMS)	Intelligent, microprocessor EMS
Automatic Light Control 2.0 (ALC 2.0)	When enabled, ALC adjusts output intensity in response to unusually low amounts of sunlight to ensure continued operation
Programming	Programmable with optional infrared programmer
	Premium grade UV resistant, polycarbonate body and lens
Construction	Waterproof battery compartment with Gore® vent
	Colour indicator matches LED colour
Temperature	-22 to 122 °F (-30 to 50 °C) operating
	-40 to 176 °F (-40 to 80 °C) storage
Weight	Flange Mount: 0.8 lbs (0.37 kg), Pole Mount: 0.9lbs (0.40 kg)
Mounting	Flange or pole-mount options. Refer to dimensional diagram for details
Wind Loading	140 knots (72 m/s)
Ice Loading	0.03 psi (22 kg/m ²)
Shock & Vibration	MIL-STD-202G (for Shock and Vibration)
	IP 68 immersion, 24 hrs at 1 m (3 ft)
Ingress	MIL-STD-202G immersion & damp heat cycling
	MIL-STD-810G rain & salt fog
Compliance	RoHS; WEEE
	FCC, CE


ORDER KEY		
MODEL	OUTPUT ▼	MOUNT ▼
OL2A	RED GREEN WHITE YELLOW BLUE	FLANGE MOUNT FLANGE MOUNT - WITH SWITCH POLE MOUNT

Specifications may be subject to change
 Carmanah is a Canadian public corporation - TSX:CMH
 © 2013, Carmanah Technologies Corp.
 Document:OL2A_Spec_Sheet

US and International patents apply. "Carmanah" and Carmanah logo are trademarks of Carmanah Technologies Corp.

PEAK INTENSITY	
COLOUR	INTENSITY
Red	17 cd
Green	21 cd
White	26 cd
Yellow	24 cd
Blue	8 cd

Note: Peak intensity depends on location and flash pattern. To view performance in your installation location visit www.carmanah.com

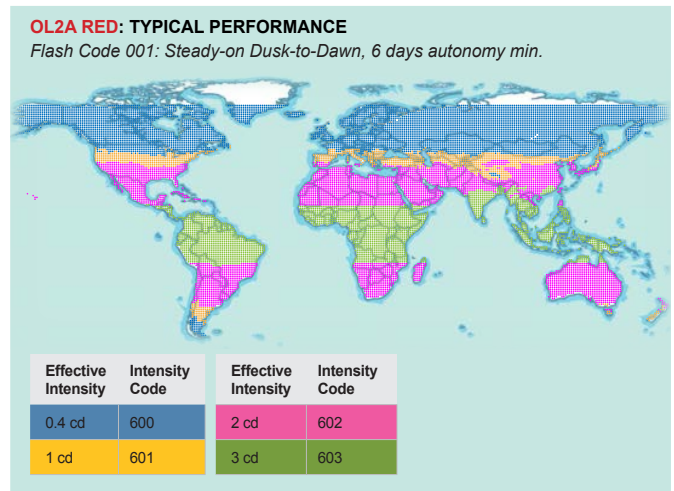

DIMENSIONS

