



FTB 302d

Medium Intensity Dual AOL Strobe



The FTB 302d is an L-864/L-865 medium intensity dual xenon strobe that provides a white flashing light for day and a red flashing light for night for structures over 500' AGL including appurtenances 40' or more above the main guyed structure (*FAA tower types F3-F6*).

Manufactured to meet specifications for FAA Type L-864 and L-865, FAA AC 150/5345-43F.

FEATURES & BENEFITS

- Interfaces with the FTC 121 controller
- Integrates with Flash dual high intensity systems
- Fresnel optics minimizes light scatter
- Available in multiple input voltages
- Optional 24/7/365 monitoring and call center services
- Component level technical support M-F 7am-7pm Central time
- NEMA 4X stainless steel outdoor rated enclosure
- Custom installation kits and stamped drawings (*see reverse*)
- (2) year parts warranty on all Xenon system components including tubes
- TIA-222 certified for all mounting hardware
- Listed on the FAA Buy American Act registry


FTB 302d

POWER CONSUMPTION

- White day - 130 watts
- Red night - 145 watts
- White night backup - 55 watts

CUSTOM CONDUIT AND WIRE KITS

For over 40 years Flash has designed and supplied FAA and NEC compliant electrical systems for towers, chimneys and other structures. Our expertise includes lighting systems, elevator circuits, utility circuits, AC electrical distribution platform circuits, area lighting, fiber optic, telco, communication, lift booms and other needs. State engineering stamped drawings for the United States and some US properties are available as an option.

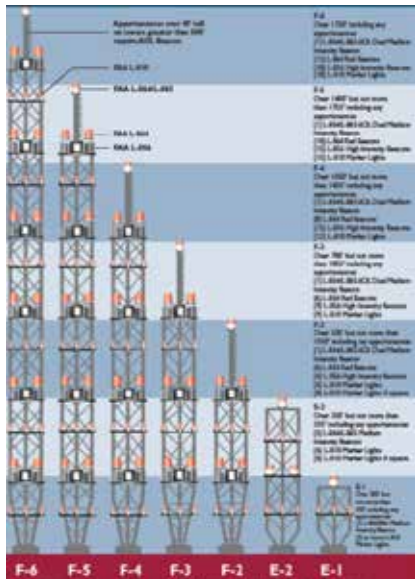

TOWER GUIDELINES

Diagram from FAA AC 70/7460-1K Change 2, A1-18. The FAA determination for these towers are chapters 2, 4 and 9.

These guidelines are for reference only. Please contact Flash for specific questions regarding obstruction marking.



Bright Ideas. Brilliant Results.

Flash Technology
332 Nichol Mill Lane
Franklin, TN 37067-8203 USA

T +1 615 503 2000
T +1 888 313 5274
F +1 615 261 2600

flashtechnology.com



ISO 9001:2015

D302D-01 Rev B

Data and specifications subject to change without notification.

©2018 Flash Technology
All rights reserved.



SPX

SPX Corporation
Global Industrial Equipment
& Global Manufacturing
spx.com